


MPL 70 SS-I



Control panel




Socket panel on request

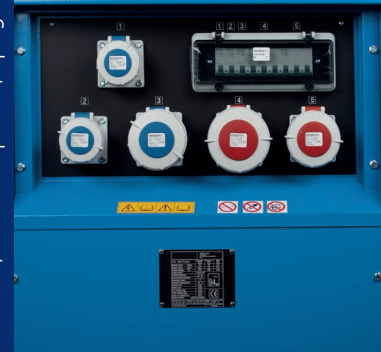

Lifting eye



Unit of measure: mm

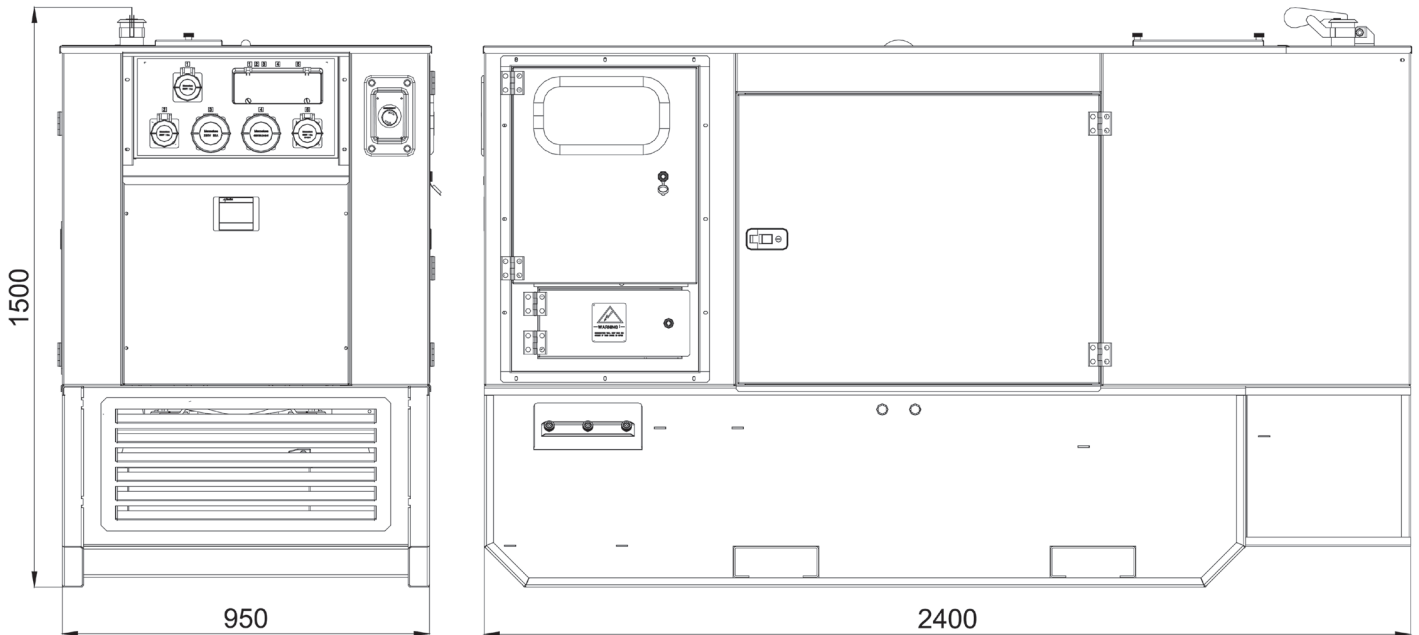

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com

mase
GENERATORS
Believing in change.



Max. Output power 66 kVA three-phase
Max. Output power 22 kVA single-phase

Description

- Super silenced power generator
- Diesel engine 1500 rpm
- Fuel tank 195 lt

Standard Features

- Controller with digital display for full monitoring of generator parameters: 3-phase generator voltage, 3-phase mains voltage, battery voltage, ammeter, frequency, hour meter, oil pressure (optional), engine temperature (optional), fuel level, fail to start; with auto engine protection shutdown system in case of: fail to start, emergency stop, low oil pressure, low fuel level, high coolant temperature, oil pressure sender open circuit, over/under voltage, over/under frequency, open door
- Foreseen for ATS or Remote control operation
- Separate tank facility c/w quick release coupling
- 12 V battery
- 400V three-phase output
- Emergency stop button
- Automatic voltage regulator (AVR)
- Central lifting eye
- Fork-lift pockets
- Bunded base to retain all liquids

Options

- Versions with different voltages
- 60Hz version
- Three-phase and single-phase socket panel with:
 - 1 x 400V - 32A EEC three-phase socket
 - 1 x 400V - 16A EEC three-phase socket
 - 1 x 230V - 32A EEC single-phase socket
- 2 x 230V - 16A EEC single-phase sockets
- Thermal protections
- Earth leakage relay
- Spark arrester muffler
- Engine heater
- Long run fuel tank (24h) complete with bunded base

Accessories on request

- GRT2W: two-wheels site tow undercarriage
- Remote Start/Stop kit with cable (20/50 mt)
- ATS panel

Noise level

- Lwa 94 (69 dB a 7 m)

AC generator - 50Hz

- Type: synchronous
- Three-phase power (stand-by): 66kVA - 400V
- Three-phase power (prime): 60kVA - 400V
- Single-phase power (max.): 22kVA - 230V
- Power Factor: $\cos \phi$ 0,8

Diesel Engine 1500 rpm

- Type: FPT NEF 45 SM1A - Turbo - 4 cyl
- - 4500 cm³
- Max power: 80 HP (59 kWm)
- Starting system: electric (12Vdc)
- Cooling system: water
- Fuel consumption @ 80%: 10,2 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 mt (*)
- Mechanical Protection: IP 23
- Fuel tank capacity: 195 lt
- Dimensions (L x W x H): 2400 x 950 x 1500 mm
- Dry weight: 1280 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.